



*Committed to your success!®*

# MINI CATALOG





4-13-201G STEM 3

5-27-201G 19A

# 13 Series Threaded Stem 27 Series Expanding Adapter

CAPACITY UP TO 160 LBS EACH

### FEATURES:

- Bright zinc plated finish
- Hardened double ball bearing raceways
- 1/2" diameter kingpin
- Standard 5/16" diameter axle with locknut

### OPTIONS:

- VertiLoc® brake; Add VL to end of model number (See brake photos on page 7)

### 13 Series Threaded Stem:

Mounting Code	Stem Size
STEM 3	1/2"-13 x 1"
STEM 4	1/2"-13 x 1-1/2"

### 27 Series Expanding Adapter:

Mounting Code	Tubing I.D. Size	Mounting Code	Tubing I.D. Size
9	3/4"	17 B	1-3/16"
11	7/8"	19 C	1-3/8"
13	1"	19 A	1-1/2"
15	1-1/8"	21	1-7/8"

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Threaded Stem Model Number 13 Series	Expanding Adapter Model 27 Series	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/8	CUSHION / SOLID RUBBER	DELTRIN	100	3-13-103	3-27-103	1-1/8	3 5/8	2 3/4
		TPR TREAD / POLY CORE	PLAIN	125	3-13-201G	3-27-201G			
		HARD / SOLID RUBBER	DELTRIN	125	3-13-104	3-27-104			
4	15/16	CUSHION / SOLID RUBBER	DELTRIN	115	4-13-103	4-27-103	1-1/2	4 5/8	3 5/16
		TPR TREAD / POLY CORE	PLAIN	125	4-13-201G	4-27-201G			
	HARD / SOLID RUBBER	DELTRIN	140	4-13-104	4-27-104				
	POLYOLEFIN	PLAIN	150	4-13-511	4-27-511				
1	POLYLOC / GREY	DELTRIN	150	4-13-211G	4-27-211G				
	5	15/16	CUSHION / SOLID RUBBER	DELTRIN	125	5-13-103	5-27-103	1-7/8	5 5/8
TPR TREAD / POLY CORE			PLAIN	150	5-13-201G	5-27-201G			
HARD / SOLID RUBBER		DELTRIN	150	5-13-104	5-27-104				
POLYOLEFIN		PLAIN	150	5-13-511	5-27-511				
1	POLYLOC / GREY	DELTRIN	160	5-13-211G	5-27-211G				




4-25-201G PLT 4

4-26-201G PLT 4

## 25/26 Series Top Plate

CAPACITY UP TO 160 LBS EACH



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Plate Model Number 25 Series	Rigid Plate Model Number 26 Series	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3	1 1/8	CUSHION / SOLID RUBBER	DELTRIN	100	3-25-103	3-26-103	1-1/8	3 3/4	2 3/4
		TPR TREAD / POLY CORE	PLAIN	125	3-25-201G	3-26-201G			
		HARD / SOLID RUBBER	DELTRIN	125	3-25-104	3-26-104			
4	15/16	CUSHION / SOLID RUBBER	DELTRIN	115	4-25-103	4-26-103	1-1/2	4 3/4	3 5/16
		TPR TREAD / POLY CORE	PLAIN	125	4-25-201G	4-26-201G			
	HARD / SOLID RUBBER	DELTRIN	140	4-25-104	4-26-104				
	POLYOLEFIN	PLAIN	150	4-25-511	4-26-511				
1	POLYLOC / GREY	DELTRIN	150	4-25-211G	4-26-211G				
	5	15/16	CUSHION / SOLID RUBBER	DELTRIN	125	5-25-103	5-26-103	1-7/8	5 3/4
TPR TREAD / POLY CORE			PLAIN	150	5-25-201G	5-26-201G			
HARD / SOLID RUBBER		DELTRIN	150	5-25-104	5-26-104				
POLYOLEFIN		PLAIN	150	5-25-511	5-26-511				
1	POLYLOC / GREY	DELTRIN	160	5-25-211G	5-26-211G				

### WHEEL SELECTION:



CUSHION & HARD / SOLID RUBBER

TPR TREAD / POLY CORE

POLYOLEFIN

POLYLOC / GREY

To order:

- **Threaded Stem caster** add mounting code (Example 3-13-511-STEM 3).
- **Expanding Adapter Stem caster** add mounting code (Example 3-13-511 9).
- **Top plate caster** add mounting code (Example 3-25-103 PLT 4).



Listed by NSF International

# 30 Series Top Plate 36 Series Threaded Stem

CAPACITY UP TO 325 LBS EACH

### FEATURES:

- Bright zinc plated finish
- Hardened double ball raceways
- 1/2" diameter kingpin
- Dust cover protects swivel bearings
- Standard 3/8" diameter axle with locknut

### OPTIONS:

- VertiLoc® brake; Add VL to end of number
  - PosiLoc® brake; Add PL to end of number
- (See brake photos on page 7)



5-30-213P PLT 2

5-36-213GD STEM 2

**Top Plate Sizes** (swivel & rigid): to order, add Plate Mounting Code to end of model number (Example: 5-30-105 **PLT1**).

30 Series Mounting Code	Top Plate Size	Bolt Hole Spacing	Bolt Size
<b>PLT 2</b>	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
<b>PLT 3</b>	3-1/8" x 4-1/8"	2-3/8" x 3-7/16"	5/16"
<b>PLT 5</b> 3-1/2", 4", 5" & 6" dia. only	3-3/4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"
<b>PLT 7</b> 5" dia. only	3-1/2" x 3-1/2"	2-5/8" x 2-5/8" to 3" x 3"	9/32"


36 Series Threaded Stem:	
Mounting Code Number	Stem Size
<b>STEM 2</b>	1/2"-13 x 1"
<b>STEM 3</b>	1/2"-13 x 1-1/2"
<b>STEM 6</b>	5/8"-11 x 1-1/4"

**Threaded Stem sizes:**  
to order, add Stem Mounting Code to end of model number (Example: 5-36-105 **STEM2**).

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Plate Model Number 30 Series	Threaded Stem Model Number 36 Series	Approximate Weight (Pounds)	Load Height (Plate)	Load Height (Threaded)	Swivel Radius (Inches)
<b>2 1/2</b>	1 1/4	CUSHION / SOLID RUBBER	DELIRIN	140	2-1/2-30-105	2-1/2-36-105	1-11/16	3 5/8	3 7/16	2 3/4
		HARD / SOLID RUBBER	DELIRIN	210	2-1/2-30-106	2-1/2-36-106	1-11/16			
		POLYOLEFIN	PLAIN	210	2-1/2-30-513	2-1/2-36-513	1-11/16			
<b>3</b>	1 1/4	CUSHION / SOLID RUBBER	DELIRIN	150	3-30-105	3-36-105	1-3/4	4 1/8	3 15/16	3
	1 1/2	HARD / SOLID RUBBER	DELIRIN	220	3-30-106	3-36-106	1-3/4			
<b>3 1/2</b>	1 1/4	POLYOLEFIN	PLAIN	250	3-30-521	3-36-521	1-3/4	4 5/8	4 7/16	3 1/4
		CUSHION / SOLID RUBBER	DELIRIN	160	3-1/2-30-105	3-1/2-36-105	2			
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-30-213GD	3-1/2-36-213GD	2-3/16			
		HARD / SOLID RUBBER	DELIRIN	230	3-1/2-30-106	3-1/2-36-106	2			
		POLYOLEFIN	PLAIN	250	3-1/2-30-513	3-1/2-36-513	2-3/16			
		ADVANTAGE TPR / FLAT	DELIRIN	250	3-1/2-30-314GF	3-1/2-36-314GF	2-3/16			
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-30-213GF	3-1/2-36-213GF	2-3/16			
		POLYLOC / BLUE	BALL	250	3-1/2-30-213P	3-1/2-36-213P	2-3/16			
		POLYLOC / GREY	DELIRIN	250	3-1/2-30-314G	3-1/2-36-314G	2-3/16			
		CUSHION / SOLID RUBBER	DELIRIN	170	4-30-105	4-36-105	2-3/8			
HARD / SOLID RUBBER	DELIRIN	250	4-30-106	4-36-106	2-3/8					
ADVANTAGE TPR / ROUND	BALL	250	4-30-213GD	4-36-213GD	2-1/2					
POLYLOC / BLUE	BALL	275	4-30-213P	4-36-213P	2-1/2					
POLYLOC / GREY	DELIRIN	275	4-30-314G	4-36-314G	2-1/2					
POLYOLEFIN	PLAIN	275	4-30-513	4-36-513	2-1/2					
ADVANTAGE TPR / FLAT	DELIRIN	300	4-30-314GF	4-36-314GF	2-1/2					
ADVANTAGE TPR / FLAT	BALL	300	4-30-213GF	4-36-213GF	2-1/2					
1 1/2	PHENOLIC	PLAIN	300	4-30-121	4-36-121	2-1/2				
<b>5</b>	1 1/4	CUSHION / SOLID RUBBER	DELIRIN	200	5-30-105	5-36-105	2-3/4	6 1/4	6 1/16	4
		ADVANTAGE TPR / ROUND	BALL	250	5-30-213GD	5-36-213GD	3			
		HARD / SOLID RUBBER	DELIRIN	280	5-30-106	5-36-106	2-3/4			
		POLYLOC / BLUE	BALL	300	5-30-213P	5-36-213P	3			
		POLYLOC / GREY	DELIRIN	300	5-30-314G	5-36-314G	3			
		POLYOLEFIN	PLAIN	300	5-30-513	5-36-513	3			
		ADVANTAGE TPR / FLAT	DELIRIN	325	5-30-314GF	5-36-314GF	3			
		ADVANTAGE TPR / FLAT	BALL	325	5-30-213GF	5-36-213GF	3			
		1 1/2	PHENOLIC	PLAIN	300	5-30-121	5-36-121			
	<b>6</b>	1 1/4	CUSHION / SOLID RUBBER	DELIRIN	220	6-30-105	6-36-105			
ADVANTAGE TPR / ROUND			BALL	300	6-30-213GD	6-36-213GD	3-3/4			
POLYLOC / GREY			DELIRIN	300	6-30-314G	6-36-314G	3-3/4			
POLYLOC / BLUE			BALL	300	6-30-213P	6-36-213P	3-3/4			
1 1/2		POLYOLEFIN	PLAIN	300	6-30-521	6-36-521	3-3/4			
		PHENOLIC	PLAIN	300	6-30-121	6-36-121	3-3/4			

To order:

Rigid top plate caster change 30 to 31 mounting code (Example 2-1/2-**31**-105 PLT 2).

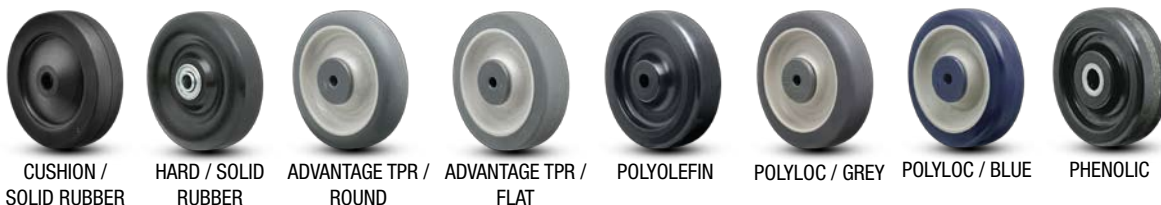

Listed by NSF International

# 34 Series Spring Ring Stem

CAPACITY UP TO 325 LBS EACH



5-34-213GD STEM 3

## FEATURES:

- Bright zinc plated finish
- Hardened double ball bearing swivel raceways
- 1/2" diameter kingpin
- Dust cover protects swivel bearings
- Standard 3/8" diameter axle with locknut

## OPTIONS:

- VertiLoc® brake; Add VL to end of number
  - PosiLoc® brake; Add PL to end of number
- (See brake photos on page 7)

### Round - Spring Ring Stem:

Mounting Code	Stem Size
STEM 3	.845 dia. x 2-3/16"
STEM 4	.865 dia. x 2-3/16"

### Square - Spring Ring Stem:

Mounting Code	Stem Size
STEM 6	.860 sq. x 2-3/16"
STEM 7	.875 sq. x 2-1/2" w/2 holes



Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Spring Ring Model Number 34 Series	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION / SOLID RUBBER	DELRIN	160	3-1/2-34-105	2	4 7/16	3 1/4
		ADVANTAGE TPR / ROUND	DELRIN	225	3-1/2-34-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-34-213GD	2-3/16		
		HARD / SOLID RUBBER	DELRIN	230	3-1/2-34-106	2		
		POLYOLEFIN	PLAIN	250	3-1/2-34-513	2-3/16		
		ADVANTAGE TPR / FLAT	DELRIN	250	3-1/2-34-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-34-213GF	2-3/16		
		POLYLOC / BLUE	BALL	250	3-1/2-34-213P	2-3/16		
		POLYLOC / GREY	DELRIN	250	3-1/2-34-314G	2-3/16		
4	1 1/4	CUSHION / SOLID RUBBER	DELRIN	170	4-34-105	2-3/8	4 15/16	3 1/2
		HARD / SOLID RUBBER	DELRIN	250	4-34-106	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-34-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-34-213GD	2-1/2		
		POLYLOC / BLUE	BALL	275	4-34-213P	2-1/2		
		POLYLOC / GREY	DELRIN	275	4-34-314G	2-1/2		
		POLYOLEFIN	PLAIN	275	4-34-513	2-1/2		
		ADVANTAGE TPR / FLAT	DELRIN	300	4-34-314GF	2-1/2		
		ADVANTAGE TPR / FLAT	BALL	300	4-34-213GF	2-1/2		
	1 1/2	PHENOLIC	PLAIN	300	4-34-121	2-1/2		
5	1 1/4	CUSHION / SOLID RUBBER	DELRIN	200	5-34-105	2-3/4	6 1/16	4
		ADVANTAGE TPR / ROUND	DELRIN	250	5-34-314GD	3		
		ADVANTAGE TPR / ROUND	BALL	250	5-34-213GD	3		
		HARD / SOLID RUBBER	DELRIN	280	5-34-106	2-3/4		
		POLYLOC / BLUE	BALL	300	5-34-213P	3		
		POLYLOC / GREY	DELRIN	300	5-34-314G	3		
		POLYOLEFIN	PLAIN	300	5-34-513	3		
		ADVANTAGE TPR / FLAT	DELRIN	325	5-34-314GF	3		
	ADVANTAGE TPR / FLAT	BALL	325	5-34-213GF	3			
1 1/2	PHENOLIC	PLAIN	300	5-34-121	2-1/2			



### Adjustable Height Caster (3-36-521-SATP)

Special caster has adjustable load height of 7 3/4" to 9 1/4". Height adjustment is achieved by turning the stem until the desired height is reached. Stem locks in place with a set screw. Wheel is 3" x 1 1/2" polyolefin with plain bearing.

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 2	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
PLT 7	3-1/2" x 3-1/2"	2-5/8" x 2-5/8" to 3" x 3"	9/32"

To order:

- Add mounting code (Example 3-36-521-SATP PLT 2).

To order:

- Spring Ring caster add mounting code (Example 2-1/2-34-105-STEM 6).

### WHEEL SELECTION:



CUSHION / SOLID RUBBER    HARD / SOLID RUBBER    ADVANTAGE TPR / ROUND    ADVANTAGE TPR / FLAT    POLYOLEFIN    POLYLOC / GREY    POLYLOC / BLUE    PHENOLIC



Listed by NSF International



# 40 Series Expanding Adapter Stem

CAPACITY UP TO 325 LBS EACH

## FEATURES:

- Bright zinc plated finish
- Hardened double ball bearing swivel raceways
- 1/2" diameter kingpin
- Dust cover protects swivel bearings
- Standard 3/8" diameter axle with locknut

## OPTIONS:

- VertiLoc® brake; Add VL to end of number
  - PosiLoc® brake; Add PL to end of number
- (See brake photos on page 7)




5-40-314G 19A

## Rubber Expanding Adapters

Adapter Number	ID of Round or Square Tube (Inches)	Tube Size Range (Inches)
9	3/4	0.720-0.851
11*	7/8	0.852-0.927
13	1	0.928-1.029
15	1-1/8	1.030-1.140
17B	1-3/16	1.178-1.303
19C*	1-3/8	1.360-1.425
19A	1-1/2	1.426-1.589
21	1-7/8	1.790-1.850

## Adapter Kit Parts

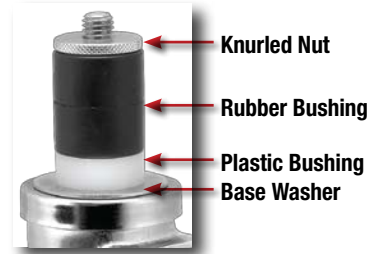

\*Stainless Steel knurled nut and base washer.

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Expanding Adaptor Model Number 40 Series	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
3 1/2	1 1/4	CUSHION / SOLID RUBBER	DELRIN	160	3-1/2-40-105	2	4 7/16	3 1/4
		ADVANTAGE TPR / ROUND	DELRIN	225	3-1/2-40-314GD	2-3/16		
		ADVANTAGE TPR / ROUND	BALL	225	3-1/2-40-213GD	2-3/16		
		HARD / SOLID RUBBER	DELRIN	230	3-1/2-40-106	2		
		POLYOLEFIN	PLAIN	250	3-1/2-40-513	2-3/16		
		ADVANTAGE TPR / FLAT	DELRIN	250	3-1/2-40-314GF	2-3/16		
		ADVANTAGE TPR / FLAT	BALL	250	3-1/2-40-213GF	2-3/16		
		POLYLOC / BLUE	BALL	250	3-1/2-40-213P	2-3/16		
		POLYLOC / GREY	DELRIN	250	3-1/2-40-314G	2-3/16		
4	1 1/4	CUSHION / SOLID RUBBER	DELRIN	170	4-40-105	2-3/8	4 15/16	3 1/2
		HARD / SOLID RUBBER	DELRIN	250	4-40-106	2-3/8		
		ADVANTAGE TPR / ROUND	DELRIN	250	4-40-314GD	2-1/2		
		ADVANTAGE TPR / ROUND	BALL	250	4-40-213GD	2-1/2		
		POLYLOC / BLUE	BALL	275	4-40-213P	2-1/2		
		POLYLOC / GREY	DELRIN	275	4-40-314G	2-1/2		
		POLYOLEFIN	PLAIN	275	4-40-513	2-1/2		
		ADVANTAGE TPR / FLAT	DELRIN	300	4-40-314GF	2-1/2		
		ADVANTAGE TPR / FLAT	BALL	300	4-40-213GF	2-1/2		
	1 1/2	PHENOLIC	PLAIN	300	4-40-121	2-1/2		
		5	1 1/4	CUSHION / SOLID RUBBER	DELRIN	200		
ADVANTAGE TPR / ROUND	DELRIN			250	5-40-314GD	3		
ADVANTAGE TPR / ROUND	BALL			250	5-40-213GD	3		
HARD / SOLID RUBBER	DELRIN			280	5-40-106	2-3/4		
POLYLOC / BLUE	BALL			300	5-40-213P	3		
POLYLOC / GREY	DELRIN			300	5-40-314G	3		
POLYOLEFIN	PLAIN			300	5-40-513	3		
ADVANTAGE TPR / FLAT	DELRIN			325	5-40-314GF	3		
ADVANTAGE TPR / FLAT	BALL			325	5-40-213GF	3		
1 1/2	PHENOLIC	PLAIN	300	5-40-121	2-1/2			
6	1 1/4	CUSHION / SOLID RUBBER	DELRIN	220	6-40-105	3-1/8	7 1/16	4 1/2
		ADVANTAGE TPR / ROUND	BALL	300	6-40-213GD	3-3/4		
		POLYLOC / GREY	DELRIN	300	6-40-314G	3-3/4		
		POLYLOC / BLUE	BALL	300	6-40-213P	3-3/4		
	1 1/2	POLYOLEFIN	PLAIN	300	6-40-521	3-3/4		
		PHENOLIC	PLAIN	300	6-40-121	2-1/2		

To order:

- **Expanding Adapter caster** add mounting code (Example 2-1/2-34-105-9).

## WHEEL SELECTION:



Listed by NSF International



Listed by NSF International

## S30 Series Stainless Steel Top Plate

CAPACITY UP TO 325 LBS EACH

### FEATURES:

- Stainless steel finish
- Double ball bearing swivel raceways
- Grease sealed raceways with zerk
- 1/2" diameter kingpin
- Stainless 3/8" diameter axle with locknut

### OPTIONS:

- Black and white polyolefin wheels available- For white polyolefin wheels add WH after 513 (Example: 5-S30-513WH)
- VertiLoc® brake; Add VL to end of number
- PosiLoc® brake; Add PL to end of number (See brake photos on page 7)

Top Plate Sizes (swivel & rigid): to order, add Mounting Code to end of model number (Example: 5-30-314 PLT 2).

Mounting Code	Top Plate Size	Bolt Hole Spacing	Mounting Bolt Size
PLT 2	2-3/8" x 3-5/8"	1-3/4" x 3"	5/16"
PLT 5	3-3/4" x 4-1/2"	2-5/8" x 3-5/8" to 3" x 3"	3/8"

5-S30-513WH

5-S31-314GF

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number S30 Series	Rigid Caster Model Number S31 Series	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	1 1/4	ADVANTAGE TPR / ROUND	DELTRIN	250	4-S30-314GD	4-S31-314GD	2-1/4	5 1/16	3 1/2
		ADVANTAGE TPR / FLAT	DELTRIN	300	4-S30-314GF	4-S31-314GF	2-1/4		
		POLYOLEFIN	SS SLEEVE	300	4-S30-513	4-S31-513	2-1/4		
		POLYLOC / GREY	DELTRIN	300	4-S30-314G	4-S31-314G	2-1/4		
5	1 1/4	ADVANTAGE TPR / ROUND	DELTRIN	250	5-S30-314GD	5-S31-314GD	2-3/4	6 1/8	4
		POLYOLEFIN	SS SLEEVE	300	5-S30-513	5-S31-513	2-3/4		
		POLYLOC / GREY	DELTRIN	300	5-S30-314G	5-S31-314G	2-3/4		
		ADVANTAGE TPR / FLAT	DELTRIN	325	5-S30-314GF	5-S31-314GF	2-3/4		
6	1 1/4	CUSHION / SOLID RUBBER	DELTRIN	220	6-S30-105	6-S31-105	3-1/4	7 3/16	4 1/2
		ADVANTAGE TPR / ROUND	DELTRIN	300	6-S30-314GD	6-S31-314GD	3-1/4		
		POLYLOC / GREY	DELTRIN	300	6-S30-314G	6-S31-314G	3-1/4		
	1 1/2	POLYOLEFIN	SS SLEEVE	300	6-S30-52	6-S31-521	3-1/4		



## S81 Series Stainless Steel Top Plate


CAPACITY UP TO 1,250 LBS EACH

### FEATURES:

- Stainless steel finish
- Double ball bearing swivel raceways
- 5/8" diameter kingpin
- Stainless 1/2" diameter axle with locknut

### OPTIONS:

- Black or white polyolefin wheels available- For white polyolefin wheels add WH after 531 (Example: 5-S81-531WH)
- Upper and lower raceway seals-call for details
- VertiLoc™ HD brake; Add VL to end of number



6-S82-531WH

6-S81-320G

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number S81 Series	Rigid Caster Model Number S82 Series	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
5	2	E-FLEX	DELTRIN	375	5-S81-320EF	5-S82-320EF	5-1/2	6 1/2	4 5/16
		POLYOLEFIN	PLAIN	650	5-S81-531	5-S82-531	5-1/2		
		POLYLOC / GREY	DELTRIN	700	5-S81-320G	5-S82-320G	5-1/2		
		PHENOLIC	DELTRIN	1,000	5-S81-322	5-S82-322	5-1/2		
6	2	ADVANTAGE TPR / ROUND	DELTRIN	450	6-S81-320GD	6-S82-320GD	6-1/2	7 1/2	5 1/16
		E-FLEX	DELTRIN	600	6-S81-320EF	6-S82-320EF	6-1/2		
		POLYOLEFIN	PLAIN	700	6-S81-531	6-S82-531	6-1/2		
		POLYLOC / GREY	DELTRIN	800	6-S81-320G	6-S82-320G	6-1/2		
		PHENOLIC	DELTRIN	1,200	6-S81-322	6-S82-322	6-1/2		
8	2	ADVANTAGE TPR / ROUND	DELTRIN	450	8-S81-320GD	8-S82-320GD	8	9 1/2	6 1/2
		ADVANTAGE TPR / FLAT	DELTRIN	675	8-S81-320GF	8-S82-320GF	8		
		POLYOLEFIN	PLAIN	900	8-S81-531	8-S82-531	8		
		POLYLOC / GREY	DELTRIN	1,000	8-S81-320G	8-S82-320G	8		
		PHENOLIC	DELTRIN	1,250	8-S81-322	8-S82-322	8		

### S30/S31 WHEEL SELECTION:

### S81/S82 WHEEL SELECTION:



CUSHION / SOLID RUBBER

ADVANTAGE TPR / ROUND

ADVANTAGE TPR / FLAT

POLYOLEFIN

POLYLOC / GREY

E-FLEX

POLYLOC / GREY

POLYOLEFIN

PHENOLIC

ADVANTAGE TPR ROUND OR FLAT



# 81 Series Top Plate


CAPACITY UP TO 1,250 LBS EACH

## FEATURES:

- Zinc finish
- Double ball bearing raceways
- Steel rivet kingpin; hydraulically upset
- Standard 1/2" diameter axle with locknut
- Zerk grease fitting in swivel raceway

## OPTIONS:

- VertiLoc® HD brake; Add VL to end of number
- PosiLoc® HD brake; Add PL to end of number (See brake photos below)
- Delrin bearings or precision ball bearings available on most wheels (call for details)
- 5 x 5-1/2" top plate size (call for details)



Listed by NSF International



6-81-220GB

6-82-220GF

Wheel Diameter (Inches)	Tread Width (Inches)	Wheel Type	Bearing	Capacity (Pounds)	Swivel Caster Model Number 81 Series	Rigid Caster Model Number 82 Series	Approximate Weight (Pounds)	Load Height (Inches)	Swivel Radius (Inches)
4	2	E-FLEX / FLAT	ROLLER	350	4-81-220EF	4-82-220EF	4-1/2	5 5/8	3 9/16
		MOLDON RUBBER / CAST IRON CORE	ROLLER	400	4-81-620CI	4-82-620CI	6-1/2		
		POLYOLEFIN	ROLLER	500	4-81-532	4-82-532	4-1/2		
		POLYLOC / GREY	BALL	600	4-81-220GB	4-82-220GB	4-1/2		
		MOLDON POLYURETHANE / IRON CORE	ROLLER	700	4-81-720CI	4-82-720CI	6-1/2		
		PHENOLIC	ROLLER	800	4-81-222	4-82-222	5		
		SOLID ELASTOMER	BALL	1250	4-81-770	4-82-770	4-1/2		
5	2	E-FLEX / FLAT	ROLLER	375	5-81-220EF	5-82-220EF	5	6 1/2	4 5/16
		MOLDON RUBBER / CAST IRON CORE	ROLLER	400	5-81-620CI	5-82-620CI	6-1/2		
		POLYOLEFIN	ROLLER	650	5-81-532	5-82-532	5		
		POLYLOC / GREY	BALL	700	5-81-220GB	5-82-220GB	5		
		MOLDON POLYURETHANE / IRON CORE	ROLLER	900	5-81-720CI	5-82-720CI	6-1/2		
		PHENOLIC	ROLLER	1,000	5-81-222	5-82-222	5-1/2		
		SOLID ELASTOMER	BALL	1250	5-81-770	5-82-770	5		
6	2	E-FLEX / FLAT	ROLLER	600	6-81-220EF	6-82-220EF	5-1/2	7 1/2	5 1/16
		ADVANTAGE TPR / ROUND	BALL	500	6-81-220GDB	6-82-220GDB	6-1/2		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	450	6-81-620CI	6-82-620CI	5-1/2		
		POLYOLEFIN	ROLLER	450	6-81-532	6-82-532	7-1/2		
		POLYLOC / GREY	BALL	700	6-81-220GB	6-82-220GB	5-1/2		
		MOLDON POLYURETHANE / IRON CORE	ROLLER	900	6-81-720CI	6-82-720CI	5-1/2		
		PHENOLIC	ROLLER	1,200	6-81-222	6-82-222	7-1/2		
SOLID ELASTOMER	BALL	1,250	6-81-770	6-82-770	6-1/2				
8	2	ADVANTAGE TPR / ROUND	BALL	500	8-81-220GDB	8-82-220GDB	6-1/2	9 1/2	6 1/2
		ADVANTAGE TPR / FLAT	ROLLER	675	8-81-220GF	8-82-220GF	6-1/2		
		MOLDON RUBBER / CAST IRON CORE	ROLLER	500	8-81-620CI	8-82-620CI	6-1/2		
		POLYOLEFIN	ROLLER	900	8-81-532	8-82-532	9-1/2		
		POLYLOC / GREY	BALL	900	8-81-220GB	8-82-220GB	6-1/2		
		MOLDON POLYURETHANE / IRON CORE	ROLLER	900	8-81-720CI	8-82-720CI	6-1/2		
		PHENOLIC	ROLLER	1,250	8-81-222	8-82-222	9-1/2		
SOLID ELASTOMER	BALL	1,250	8-81-770	8-82-770	8				

## WHEEL SELECTION:



## Brake/Swivel Lock Options



To order, specify swivel lock part number "3091-22". For stainless steel swivel lock order part number "3091-17".





**Jarvis Caster Company**

881 Lower Brownsville Road • Jackson, TN 38301 • Phone: 800-995-9876 • Fax: 800-259-7188  
info@jarviscaster.com • www.jarviscaster.com